


MilDot Special

RD illuminated.

Illuminated reticle for estimating range, hold-over and windage at long ranges.

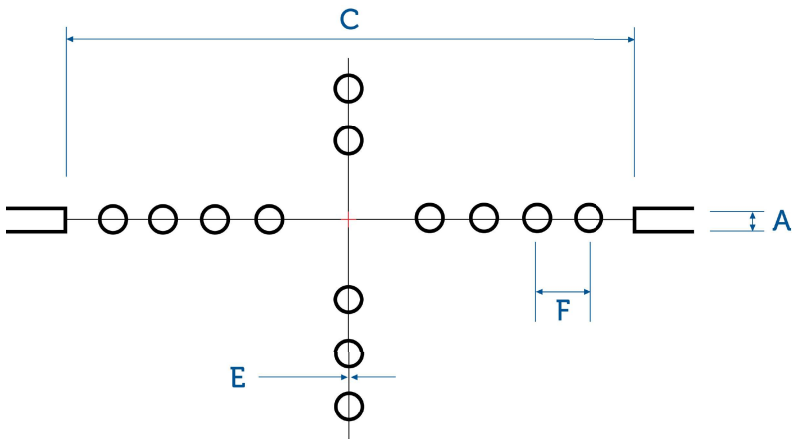

ZD 4-16x44 RD

	Dimensions				
	cm/100m	in/100yd	MOA	mRad	Power
A	2,0	0,72	0,69	0,20	14x
C	64,0	23,04	22,00	6,40	14x
E	0,2	0,07	0,07	0,02	14x
F	10,0	3,60	3,44	1,00	14x